
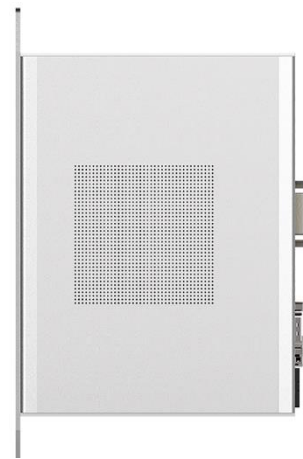


# FlexiBowl®

by ars

## FlexiVision Options Datasheet




## Lenovo ThinkCentre (standard) CE000412



Item	ThinkStation P360 - Tiny
Processor	Intel Core i7- 12700 (up to 4,7 GHz with Turbo Boost)
Operating System	Windows 11 Pro 64
Operating System Language	Windows 10 Pro 64 EUW (EN/FR/DE/NL/IT)
RAM	8 GB DDR5 4800MHz SoDIMM
Video Adapter	Integrated video adapter
Networking	1x Ethernet Port Intel Wi-Fi 6
Power Adapter	230 W power adapter
Mount	VESA Mount
Dimensions	(L) 182,9 mm x (W) 179 mm x (H)37 mm
Memory	SSD 256 GB M.2 2280 PCIe Gen4 TLC OP
Specifications	Weight 1.5Kg Temperature: Operating: 10°C (50°F) to 35°C (95°F) Storage: -40°C (-40°F) to 60°C (140°F) Humidity: Operating: 20% to 80% Storage: 10% to 90%

# LUMIABOOK (industrial) CE000557

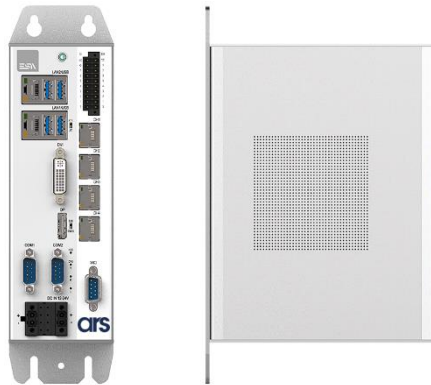

Item	LUMIABOOK
<b>Processor</b>	CPU I5 7500T QuadCore 2,7GHz
<b>Operating System</b>	Windows 10 IoT Enterprise 2019 LTSC VALUE 64 bit
<b>RAM</b>	8GB RAM DDR4-2400/2133MHz
<b>Video Adapter</b>	Integrated Graphics
<b>Video Output</b>	1x DP 1x DVI-I
<b>Networking</b>	6x LAN (4 of them PoE) 4x USB 3.0
<b>Power Adapter</b>	2x2-pin pluggable terminal block for 12~24V input
<b>Consumption</b>	10-80W
<b>Memory</b>	SSD 256GB SATA 2.5
<b>Dimensions</b>	(L)255mm x (W)155mm x (H)70.8mm
<b>Specifications</b>	Weight 4kg Operating temperature -20....60°C Storage temperature -40..+80°C Humidity 10..85% @ 40°C Certifications: CE

## PC All-in-One (industrial) GM000952



Item	PC All-in-One LCD 18.5" wide 1366x768
<b>Processor</b>	CPU Intel® Core™ i5-7300U Dual Core 2.6GHz SoC, Fanless
<b>Operating System</b>	Windows 10 IoT Enterprise 2019 LTSC VALUE 64 bit
<b>Touch Screen</b>	5-wire resistive touch screen
<b>RAM</b>	RAM 8 GB DDR4 SO-DIMM 260 PIN 1866/2133 MHz
<b>Video Adapter</b>	Integrated Graphics
<b>COM Ports</b>	2x Ethernet 10/100/1000 Mbs RJ45 1x RSR232/RS485 1x USB 2.0 4x USB 3.0 1x VGA+ 1x DP++
<b>Power Adapter</b>	15~36Vdc
<b>Consumption</b>	25~50W
<b>Mount</b>	Panel Mount
<b>External Dimensions</b>	(L)503,7mm x (W) 324,7mm x (H) 62,1mm
<b>Memory</b>	SSD 128 GB SATA 2.5"
<b>Specifications</b>	<p style="text-align: center;">Weight 8.5kg                      IP66 frontal protection                      Operating temperature 0...50°C                      Storage temperature -20..+65°C                      Humidity &lt; 85% no condensation</p> <p style="text-align: center;">Certifications: CE / EN61000-6-2 / EN61000-6-4 / EN60068-2-6 /                      EN60068-2-6/27/30 / cULus (Certificate no. E189179) / EAC / ATEX                      2014/34/UE directive Group II Category 3 G D Zone 2/22</p>

# Display Touch Screen (industrial) GM000699



<b>Item</b>	<b>Display Touch Screen 21.5" wide 1920x1080</b>
<b>Touch Screen</b>	5-wire resistive touch screen (RSR232/USB-B)
<b>Video Input</b>	1x VGA 1x DVI-D
<b>Cable Kit</b>	1x VGA 9PIN 2,0M 2x USB A-B 1,8M
<b>Power Adapter</b>	18~30Vdc (Absorption 30W)
<b>Mount</b>	Panel Mount
<b>External Dimensions</b>	(L)572mm x (W) 363mm x (H) 61mm
<b>Specifications</b>	Weight 10.5kg IP66 frontal protection Operating temperature 0...50°C Storage temperature -20..+65°C Humidity < 85% no condensation Certifications: CE / EN61000-6-2 / EN61000-6-4 / EN60068-2-6 / EN60068-2-6/27/30 / EAC ATEX 2014/34/UE directive Group II Category 3 G D Zone 2/22

## Switch 10/100/1000 Gigabit, POE, CE000454



<b>Item</b>	<b>8 Port Ethernet Gigabit Unmanaged Switch</b>
<b>Ports</b>	4x Standard Ports 4x POE Ports (Up to 30W per port for a total Poe budget of 68W)
<b>Ports Type</b>	Gigabit
<b>Dimensions</b>	(L)190mm x (W) 120mm x (H) 38mm
<b>Power Adapter</b>	230 W power adapter

## Camera Cable CE000473



<b>Item</b>	<b>Cable for Cognex CIC-series GigE camera, 10 meters</b>
<b>Power</b>	+11.3 VDC to +13.2 VDC
<b>Connections</b>	6-pin Hirose connector at camera end to flying leads (no connectors)
<b>Length</b>	10 meters Standard flex(static)