


FlexiBowl[®]

by **ars**

FlexiVision Options Datasheet




Lenovo ThinkCentre (standard) CE000412



Item	ThinkStation P360 - Tiny
Processor	Intel Core i7- 12700 (up to 4,7 GHz with Turbo Boost)
Operating System	Windows 11 Pro 64
Operating System Language	Windows 10 Pro 64 EUW (EN/FR/DE/NL/IT)
RAM	8 GB DDR5 4800MHz SoDIMM
Video Adapter	Integrated video adapter
Networking	1x Ethernet Port Intel Wi-Fi 6
Power Adapter	230 W power adapter
Mount	VESA Mount
Dimensions	(L) 182,9 mm x (W) 179 mm x (H)37 mm
Memory	SSD 256 GB M.2 2280 PCIe Gen4 TLC OP
Specifications	Weight 1.5Kg Temperature: Operating: 10°C (50°F) to 35°C (95°F) Storage: -40°C (-40°F) to 60°C (140°F) Humidity: Operating: 20% to 80% Storage: 10% to 90%

LUMIABOOK (industrial) CE000557

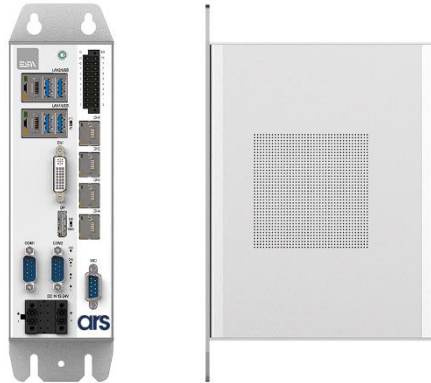

Item	LUMIABOOK
Processor	CPU I5 7500T QuadCore 2,7GHz
Operating System	Windows 10 IoT Enterprise 2019 LTSC VALUE 64 bit
RAM	8GB RAM DDR4-2400/2133MHZ
Video Adapter	Integrated Graphics
Video Output	1x DP 1x DVI-I
Networking	6x LAN (4 of them PoE) 4x USB 3.0
Power Adapter	2x2-pin pluggable terminal block for 12~24V input
Consumption	10-80W
Memory	SSD 256GB SATA 2.5
Dimensions	(L)255mm x (W)155mm x (H)70.8mm
Specifications	Weight 4kg Operating temperature -20....60°C Storage temperature -40..+80°C Humidity 10..85% @ 40°C Certifications: CE

PC All-in-One (industrial) GM000952



Item	PC All-in-One LCD 18.5" wide 1366x768
Processor	CPU Intel® Core™ i5-7300U Dual Core 2.6GHz SoC, Fanless
Operating System	Windows 10 IoT Enterprise 2019 LTSC VALUE 64 bit
Touch Screen	5-wire resistive touch screen
RAM	RAM 8 GB DDR4 SO-DIMM 260 PIN 1866/2133 MHz
Video Adapter	Integrated Graphics
COM Ports	2x Ethernet 10/100/1000 Mbs RJ45 1x RSR232/RS485 1x USB 2.0 4x USB 3.0 1x VGA+ 1x DP++
Power Adapter	15~36Vdc
Consumption	25~50W
Mount	Panel Mount
External Dimensions	(L)503,7mm x (W) 324,7mm x (H) 62,1mm
Memory	SSD 128 GB SATA 2.5"
Specifications	Weight 8.5kg IP66 frontal protection Operating temperature 0...50°C Storage temperature -20..+65°C Humidity < 85% no condensation Certifications: CE / EN61000-6-2 / EN61000-6-4 / EN60068-2-6 / EN60068-2-6/27/30 / cULus (Certificate no. E189179) / EAC / ATEX 2014/34/UE directive Group II Category 3 G D Zone 2/22

Display Touch Screen (industrial) CE000646



Item	Display Touch Screen 21.5" wide 1920x1080
Touch Screen	Capacitive
Video Input	1x VGA 1x DP 1x DVI-D
Power Adapter	12~32Vdc (Absorption 30W)
Mount	Panel Mount
External Dimensions	(L)560mm x (W) 350mm x (H) 60mm
Specifications	Weight 7kg IP66 frontal protection Operating temperature 0...50°C Storage temperature -20..+65°C Humidity < 90% no condensing Certifications: CE

Switch 10/100/1000 Gigabit, POE, CE000454



Item	8 Port Ethernet Gigabit Unmanaged Switch
Ports	4x Standard Ports 4x POE Ports (Up to 30W per port for a total Poe budget of 68W)
Ports Type	Gigabit
Dimensions	(L)190mm x (W) 120mm x (H) 38mm
Power Adapter	230 W power adapter

Camera Cable CE000453



Item	Cable for Cognex CIC-series GigE camera, 10 meters
Power	+11.3 VDC to +13.2 VDC
Connections	6-pin Hirose connector at camera end to flying leads (no connectors)
Length	10 meters Standard flex(static)