


FlexiBowl®

by ars

FlexiVision Options Datasheet




Lenovo ThinkCentre (standard) CE000412



Item	ThinkCentre M70q Gen5
Processor	Intel Core i7
Operating System	Windows 11 Pro 64
Operating System Language	Windows 11 Pro 64 EUW (EN/FR/DE/NL/IT)
RAM	8 GB DDR5 5600MHz SoDIMM
Video Adapter	Integrated video adapter
Networking	1x Ethernet Port Intel Wi-Fi 6
Power Adapter	230 W power adapter
Mount	VESA Mount
Dimensions	(L) 182,9 mm x (W) 179 mm x (H)37 mm
Memory	SSD 256 GB M.2 2280 PCIe Gen4 TLC OP
Specifications	Weight 1.5Kg Temperature: Operating: 10°C (50°F) to 35°C (95°F) Storage: -40°C (-40°F) to 60°C (140°F) Humidity: Operating: 20% to 80% Storage: 10% to 90%

LUMIABOOK (industrial) CE000557

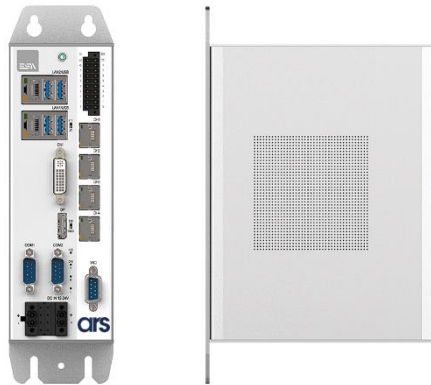

Item	LUMIABOOK
Processor	CPU I5 7500T QuadCore 2,7GHz
Operating System	Windows 10 IoT Enterprise 2019 LTSC VALUE 64 bit
RAM	8GB RAM DDR4-2400/2133MHZ
Video Adapter	Integrated Graphics
Video Output	1x DP 1x DVI-I
Networking	6x LAN (4 of them PoE) 4x USB 3.0
Power Adapter	2x2-pin pluggable terminal block for 12~24V input
Consumption	10-80W
Memory	SSD 256GB SATA 2.5
Dimensions	(L)255mm x (W)155mm x (H)70.8mm
Specifications	Weight 4kg Operating temperature -20....60°C Storage temperature -40..+80°C Humidity 10..85% @ 40°C Certifications: CE

PC All-in-One (industrial) GM000952



Item	PC All-in-One LCD 18.5" wide 1366x768
Processor	CPU Intel® Core™ i5-7300U Dual Core 2.6GHz SoC, Fanless
Operating System	Windows 10 IoT Enterprise 2019 LTSC VALUE 64 bit
Touch Screen	5-wire resistive touch screen
RAM	RAM 8 GB DDR4 SO-DIMM 260 PIN 1866/2133 MHz
Video Adapter	Integrated Graphics
COM Ports	2x Ethernet 10/100/1000 Mbs RJ45 1x RSR232/RS485 1x USB 2.0 4x USB 3.0 1x VGA+ 1x DP++
Power Adapter	15~36Vdc
Consumption	25~50W
Mount	Panel Mount
External Dimensions	(L)503,7mm x (W) 324,7mm x (H) 62,1mm
Memory	SSD 128 GB SATA 2.5"
Specifications	<p style="text-align: center;">Weight 8.5kg IP66 frontal protection Operating temperature 0...50°C Storage temperature -20..+65°C Humidity < 85% no condensation</p> <p style="text-align: center;">Certifications: CE / EN61000-6-2 / EN61000-6-4 / EN60068-2-6 / EN60068-2-6/27/30 / cULus (Certificate no. E189179) / EAC / ATEX 2014/34/UE directive Group II Category 3 G D Zone 2/22</p>

Display Touch Screen (industrial) CE000646



Item	Display Touch Screen 21.5" wide 1920x1080
Touch Screen	Capacitive
Video Input	1x VGA 1x DP 1x DVI-D
Power Adapter	12~32Vdc (Absorption 30W)
Mount	Panel Mount
External Dimensions	(L)560mm x (W) 350mm x (H) 60mm
Specifications	Weight 7kg IP66 frontal protection Operating temperature 0...50°C Storage temperature -20..+65°C Humidity < 90% no condensing Certifications: CE

Switch 10/100/1000 Gigabit, POE, CE000454



Item	8 Port Ethernet Gigabit Unmanaged Switch
Ports	4x Standard Ports 4x POE Ports (Up to 30W per port for a total Poe budget of 68W)
Ports Type	Gigabit
Dimensions	(L)190mm x (W) 120mm x (H) 38mm
Power Adapter	230 W power adapter

Camera Cable CE000453



Item	Cable for Cognex CIC-series GigE camera, 10 meters
Power	+11.3 VDC to +13.2 VDC
Connections	6-pin Hirose connector at camera end to flying leads (no connectors)
Length	10 meters Standard flex(static)